
System elements for Neurokom IP intercoms

Article number : 3086.0506
Description : Industrial intercom station in impact-resistant surface-mounted housing, type GNI/WS-929-4
Usage : For the Neurokom intercom system


Characteristics


(1) + industrial impact-resistant housing IP65 (color ral2004)	+ amplifier 1.5 W / 8 Ohms;
(2) + 4 lever switches for calls	+ amplifier 25 W ☛ optional
+ power supply via PoE / class 0	(3) + cable entry 1 x M25, 2 x M20
+ compatible with SIP products	
+ dimensions front plate: H400 x W100 x D128 mm	

View

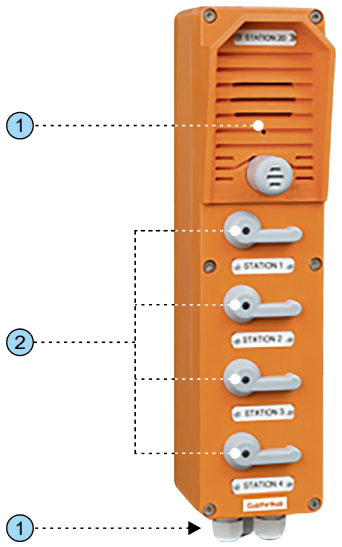

Technical

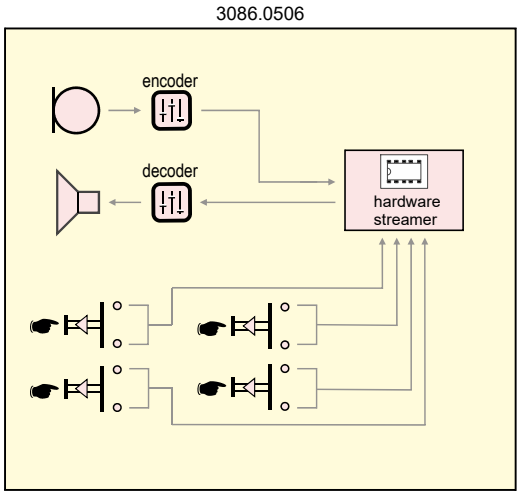

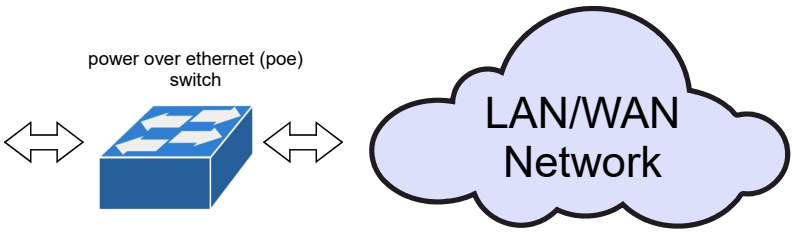

Networkprotocols:
IP, TCP, UDP, ARP, IGMP, SIP, RTP, HTTP, TFTP
available as an supplement: SNMP

Frequency range:
depending on codec, limited by speakers
G711 / 3,4 kHz- G722 / 7 kHz.
available as an supplement:
PCM32 / 15 kHz- PCM44 / 21 kHz.

HAGO Electronics B.V. | Radonstraat 179 | 2718 SV Zoetermeer | The Netherlands
Tel. +3179 3617555 | verkoop@hagoelectronics.com | www.hagoelectronics.com