
System elements for Neurokom IP intercoms

Article number : 3086.0201
Description : Wall mounted intercom main unit with built-in microphone, type GNI/WS935
Usage : For the Neurokom intercom system

Characteristics


(1) + disinfectant resistant foil keyboard	+ dimensions front plate: H248 x W122 x D7 mm
(2) + display with 4 lines of 16 characters	(4) + flush- or surface-mount with UG or AG housings ····☛ optional
+ power supply via PoE / class 0	+ AG900 housing is available in various colors
+ compatible with SIP products	(5) + installation set, type HWM-UPK10/UG900 ·····☛ optional

View

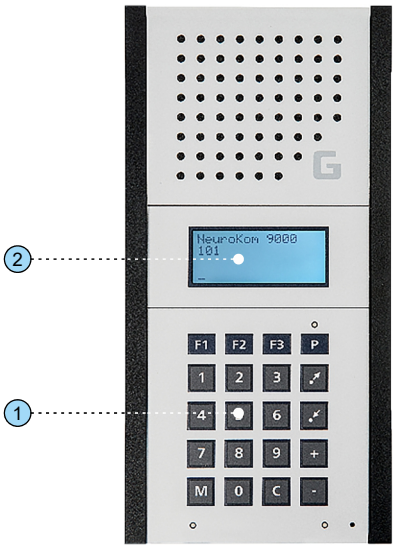





AG-900 gray : 3086.0217
AG-900 black : 3086.0237
AG-900 red : 3086.0238



UG-900

Technical

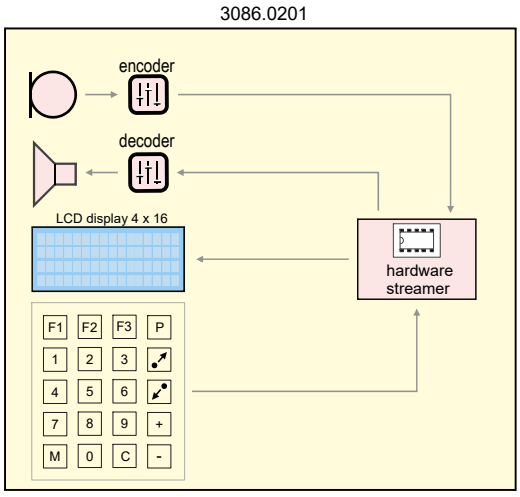

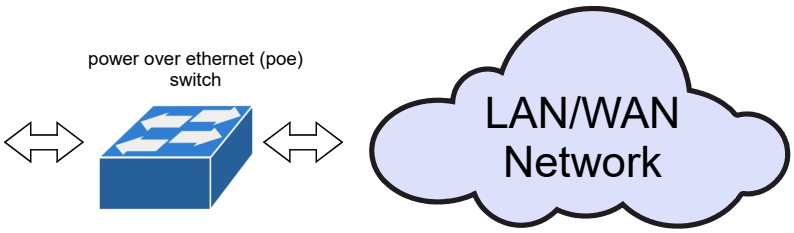

Network protocols:
IP, TCP, UDP, ARP, IGMP, SIP, RTP, HTTP, TFTP
available as an option: SNMP

Frequency range:
codec dependent, limited by speakers
G711 / 3,4 kHz- G722 / 7 kHz.
available as an option:
PCM32 / 15 kHz- PCM44 / 21 kHz.

HAGO Electronics B.V. | Radonstraat 179 | 2718 SV Zoetermeer | The Netherlands
Tel. +3179 3617555 | verkoop@hagoelectronics.com | www.hagoelectronics.com