
System elements for Neurokom IP intercoms

Article number : 3086.0207
Description : Video intercom outdoor station, flush-mounted, type GNI/WS 908-4-VIR
Usage : For the Neurokom intercom system

Characteristics


① + impact-resistant front with camera, microphone and loudspeaker
② + programmable call button and inscription field
③ + video camera 2Mp/30 FPS, 110° angle of view
+ power supply via PoE / class 0.8 W
+ dimensions front plate: H248 x W122 x D7 mm
④ + flush- or surface-mounted with UG or AG housings ☛ optional
⑤ + installation set, type HWM-UPK10/UG900 ☛ optional

View

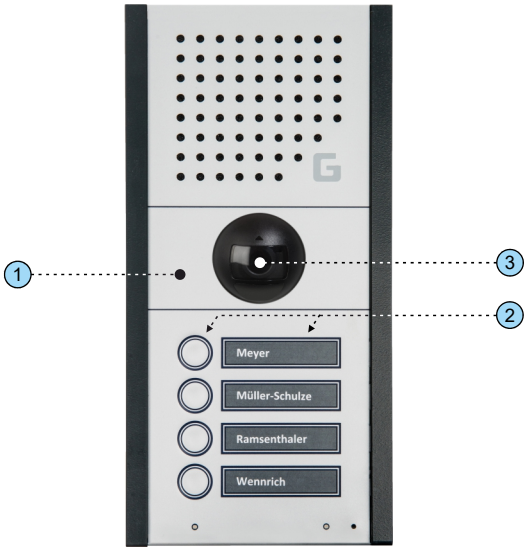





AG-900 gray : 3086.0217
AG-900 black : 3086.0237
AG-900 red : 3086.0238




UG-900

Technical

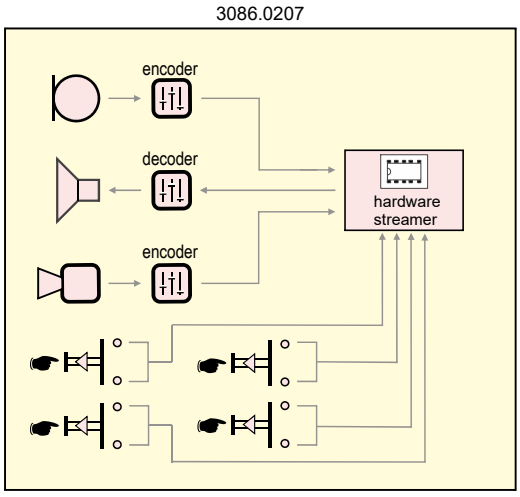



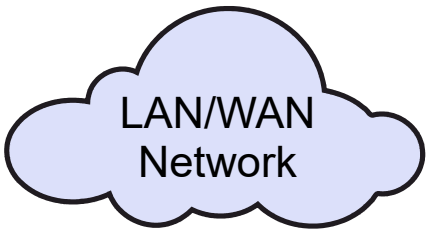

Network protocols:
IP, TCP, UDP, ARP, IGMP, SIP, RTP, HTTP, TFTP
available as an option: SNMP

Frequency range:
codec dependent, limited by speakers
G711 / 3,4 kHz- G722 / 7 kHz.
available as an option:
PCM32 / 15 kHz- PCM44 / 21 kHz.

HAGO Electronics B.V. | Radonstraat 179 | 2718 SV Zoetermeer | The Netherlands
Tel. +3179 3617555 | verkoop@hagoelectronics.com | www.hagoelectronics.com